


NOTES:

- ① CENTERLINE OF RAIL BLOCKING OFF OF INSIDE FRONT WALL.
(MIN. 28" DIMENSION)
FOR REAR MOUNT RAIL, CENTER BLOCKING INSIDE HOISTWAY.
- ② CAR TO WALL (CTW) DIMENSION IS 3" MIN.
- ③ HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.
- ④ HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.)
- ⑤ CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN.
- ⑥ MIN. CLEARANCE TO ALLOW FOR MOTOR/ BRAKE/ GEARBOX

MINIMUM RETURN REQUIREMENTS FOR GATE STACK

CAB TYPE	LEFT-SIDE RETURN	RIGHT-SIDE RETURN
WOOD	14"	10"
STAINLESS STEEL	14"	10"

All Traction Elevators require an access panel for emergency lowering. Access panel size and location must be discussed with your Residential Elevators Sales Representative prior to construction.

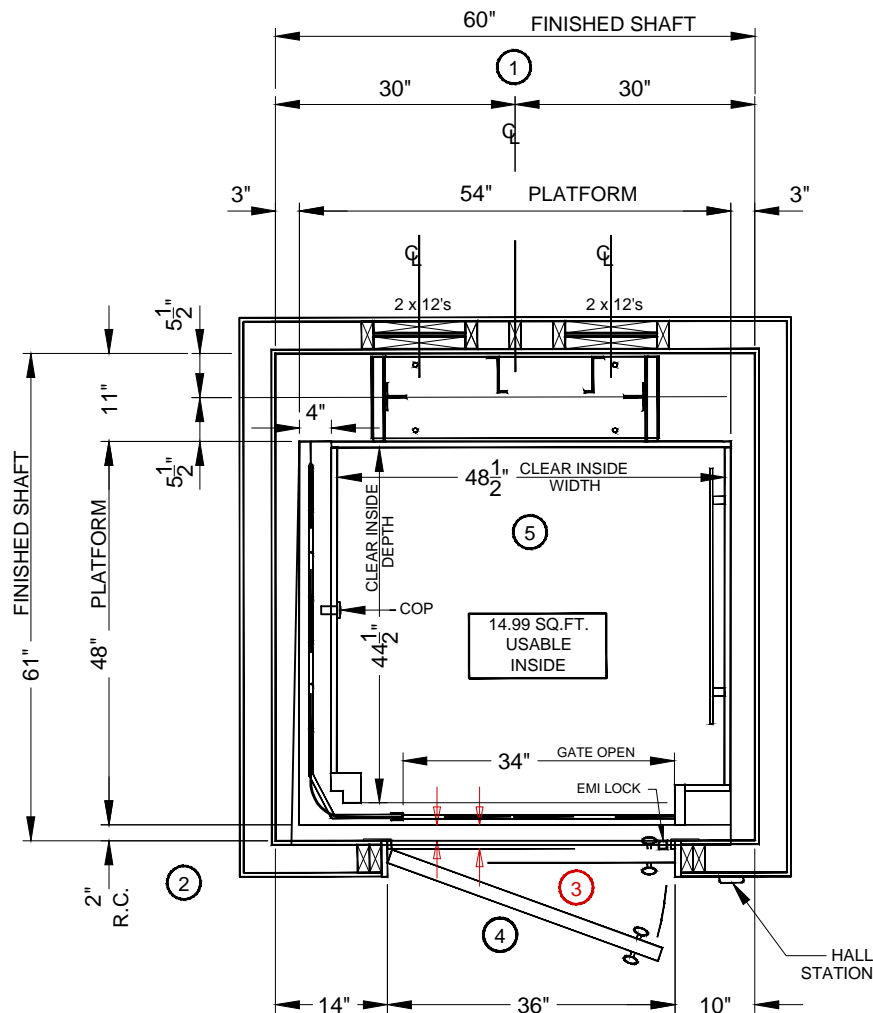

STANDARD HOISTWAY PLAN - REAR MOUNT RAIL

NOTE: NTS - ALL DIMENSIONS ARE APPROXIMATE