


HOR HP4 CRV 15 950#, RH RAIL, PASS- THROUGH OPENING, THE CURVE GATE, UP TO 15 SQ. FT. LUXURY LIFT TRACTION (LLT)

NOTES:

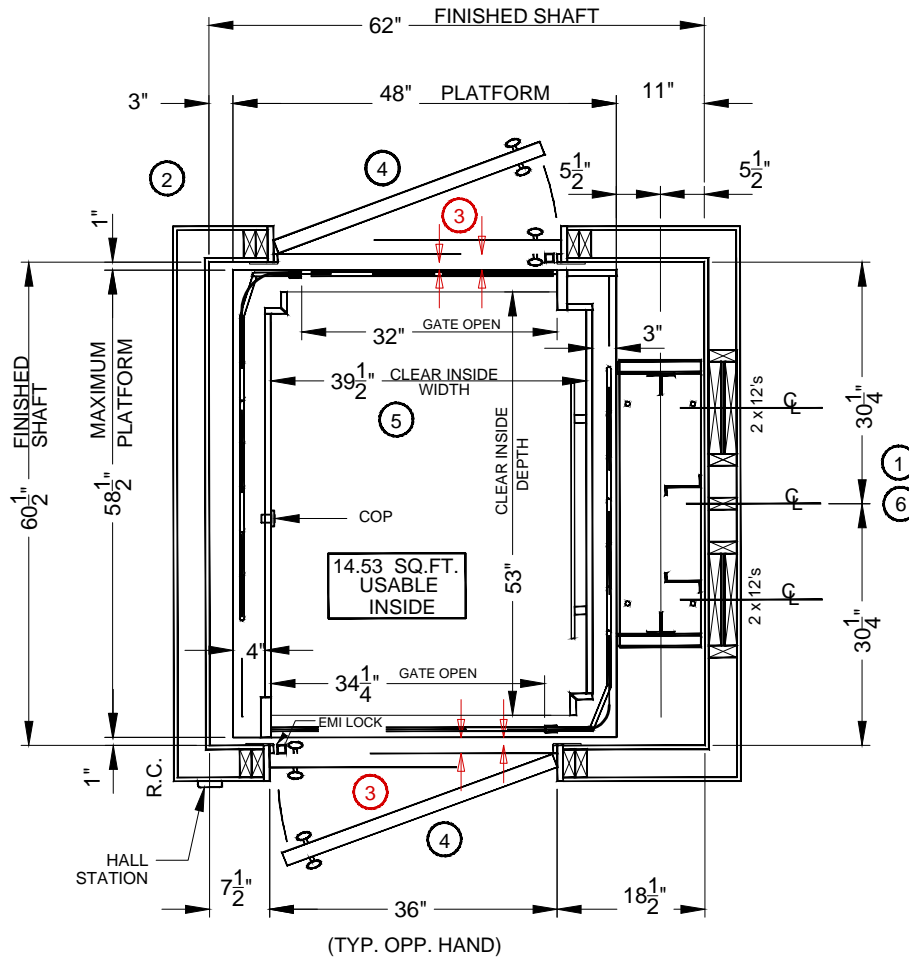

STANDARD HOISTWAY PLAN

NOTE: NTS - ALL DIMENSIONS ARE APPROXIMATE

- ① CENTERLINE OF RAIL BLOCKING OFF OF INSIDE FRONT WALL. (MIN. 28" DIMENSION)
FOR PASS THROUGH APPLICATIONS, CENTER BLOCKING INSIDE HOISTWAY.
- ② CAR TO WALL (CTW) DIMENSION IS 3" MIN.
- ③ HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.
- ④ HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.)
- ⑤ CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN.
- ⑥ MIN. CLEARANCE TO ALLOW FOR MOTOR/ BRAKE/ GEARBOX

ALL TRACTION ELEVATORS REQUIRE AN ACCESS PANEL FOR EMERGENCY LOWERING. ACCESS PANEL SIZE AND LOCATION MUST BE DISCUSSED WITH YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE PRIOR TO CONSTRUCTION.